disguise

rx II specs

Real-time power

rx II hands you the latest generation of power and flexibility to bring stunning real-time virtual environments into the real world.

Warranties & Support

– Free software upgrades for the life of the machine
– 2 year return to base hardware warranty
– 12 month RenderStream licence included

Bundled accessories

Slide Rail Kit
Rack Handles
Hardware Guide &
IEC Power Cables:
- 2× USA
- 2× EU
- 2× UK

Physical specifications

Packed Dimensions:	**W** 635mm 25"	**H** 325mm 12.8"	**D** 975mm 38.39"
Unit Dimensions:	**W** 438.5mm 17.26"	**H** 88.5mm 3.42"	**D** 788.8mm 31.06"
Unit + Rack Handles	**W** 483.5mm 19.03"		**D** 821.8mm 32.35"
Rack Depth with Slides:			**D** 914.6mm 36.01"
Unit Weight:		32kg	70.55lbs
Packed Unit Weight:		35kg	77.16lbs

rx II specs

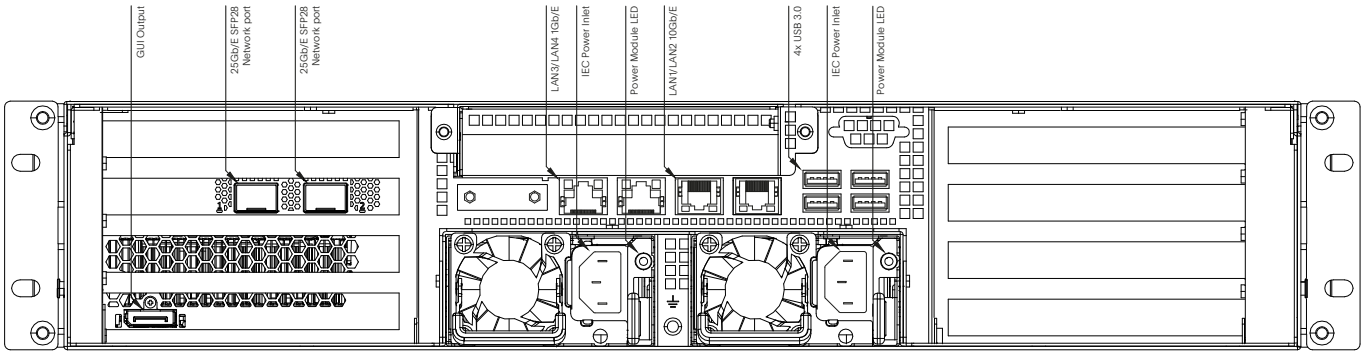

Hardware specifications

Voltage:
100-240VAC, 50-60Hz

Power Consumption:
2000W (CRPS)

Operating System:
Windows® 10 IoT Enterprise SAC

CPU:
Intel® Xeon® Silver 3.2Ghz

Memory:
96GB DDR4 RAM

Environmental Tolerances:
Temperature: 5-30°C (40°-86°F)
Humidity: 20%-80% (non-condensing)
Altitude: 0-8850 ft (0-2700m)

Mounting System:
2U 19" rack mount

Media Storage:
1× 1.8TB NVMe SSD

Secondary Expandable Storage:
Up to 8× 2.5" SATA/SAS HDD

System connectivity I/O

Video Output:
1× Displayport 1.4 (GUI)

General Network:
2× 1Gb/sec Ethernet
2× 10Gb/sec Ethernet

High Speed Network:
2× 25Gb/sec Ethernet

Data/Peripherals:
4× USB 3.0