


VX 2+

POWER NEXT-GENERATION CONTENT

The VX 2+ unlocks rock solid performance and reliability to future proof your shows and productions and meet ever growing content demands with two 4K video outputs. Fit for medium-sized studios and live experiences.

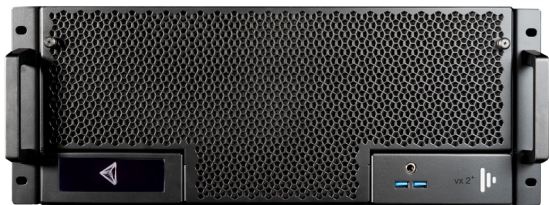

WARRANTIES & SUPPORT

2 year return to base hardware warranty
(plus options to extend warranty length)

BUNDLED ACCESSORIES

Keyboard, Mouse, Power Cable (powerCON True1: USA/EU/UK), Hardware Guide, Rear Support, Rack Slides (available upon request)

UPGRADES

(AS - At Sale, F - Field)

- Storage Upgrade 7.68TB ^{AS, F}
- Storage Upgrade 15.36TB ^{AS, F}
- Storage Upgrade 30TB ^{AS, F}

PHYSICAL SPECIFICATIONS

	W	H	D
Packed Dimensions	610mm 24"	395mm 15.5"	765mm 30"
Unit Dimensions	445mm 17.52"	178mm 7"	593mm 23.35"
Unit + Rack Handles	483mm 19"	-	621mm 24.45"
Rack Depth	-	-	585mm 23.03"
Unit Weight		14.4kg 31.75lbs	
Packed Unit Weight		20.46kg 45.1lbs	

VX 2+

HARDWARE SPECIFICATIONS

Voltage: 100-240V, 50-60Hz*

Power Connection: Neutrik powerCON True1

Power Consumption Peak: 655 W

Heat Dissipation Peak: 2,235 BTU/h

Max Decibel Rating: 56db

Operating System: Windows 11 Enterprise GAC


Environmental Tolerances: Temperature:
5-35°C (40°-95°F) / Humidity: 5%-95% (non-
condensing) / Altitude: 0-2700m (0-8850 ft)

Mounting System: 4U 19" rack mount

OS: 2x Internal Storage Drives

Storage: 3.84TB SSD (default)

Memory: 96GB RAM (6x 16GB)

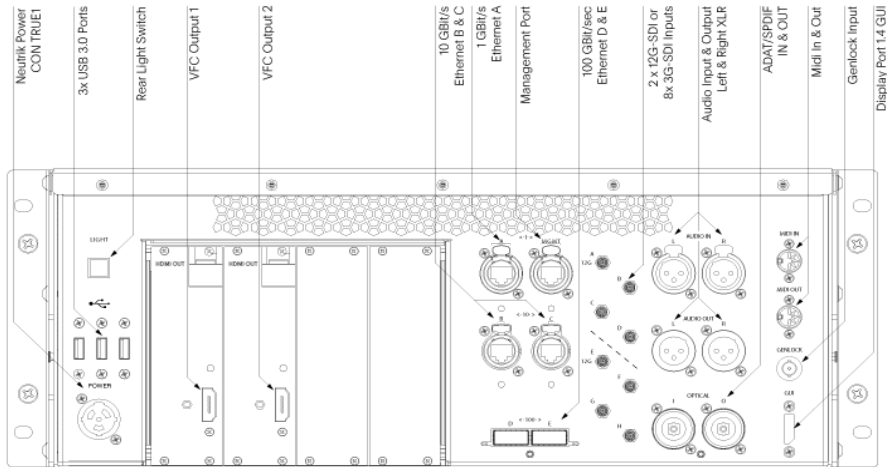

SYSTEM CONNECTIVITY I/O

Video Output:

- 1x Displayport 1.4 (GUI)
- 2x 4K outputs using VFC cards
- Ships standard with HDMI 2.0 VFC cards**

Video Input:

- 2x 12G or 8x 3G (HD-BNC connectors)

Audio:

- Balanced XLR (circular 3-pin connector) - 2x in, 2x out
- Analogue (1/4 headphone jack) - 1x in

Optical Audio:

- ADAT/SPDIF (Toslink connector) - 1x in, 1x out

MIDI:

- MIDI (circular 5-pin DIN connector) - 1x in, 1x out

General Network:

- 1x 1Gb/sec Ethernet
- 2x 10Gb/sec Ethernet

High Speed Network: 2x 100Gb/sec Ethernet

System Management Controller: 1x Management Port (Ethernet)

Data/Peripherals: 5x USB 3.0

Video Sync: 1x BNC Genlock

*for countries with variable power supply we recommend a UPS to provide a consistent voltage.

**different Video Format Conversion Cards also available, refer to VFC specifications