



Real-time power

rx hands you the power and flexibility to bring stunning real-time virtual environments into the real world.

Warranties & Support

- 12 month RenderStream licence included


Bundled accessories

- Slide Rail Kit
- Rack Handles
- Hardware Guide & IEC Power Cables:
 - 2x USA
 - 2x EU
 - 2x UK

Physical specifications

Packed Dimensions:	W	H	D
Unit Dimensions:	438.5mm 17.26"	88.5mm 3.42"	760mm 29.92"
Unit + Rack Handles	483.5mm 19.03"		D
Rack Depth with Slides:			D 914.6mm 36.01"
Unit Weight:		32kg	70.55lbs
Packed Unit Weight:		35kg	77.16lbs

rx specs

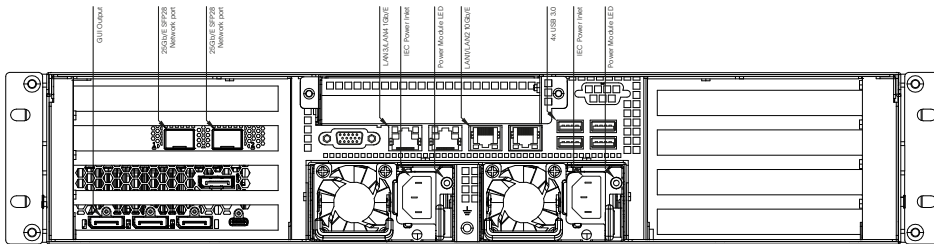

Hardware specifications

Voltage: 100-240VAC,
50-60Hz*

Power Consumption:
2000W

Operating System:
Windows® 10 IoT Enterprise
SAC

Environmental Tolerances:
Temperature: 5-30°C
(40°-86°F)
Humidity: 20%-80%
(non-condensing)
Altitude: 0-8850 ft (0-2700m)

Mounting System:
2U 19" rack mount

Media Storage:
1x 1.92TB Internal NVMe SSD

Secondary Expandable Storage:
Up to 8x 2.5" SATA/SAS HDD

System connectivity I/O

Video Output:
1x Displayport 1.4 (GUI)

General Network:
2x 1Gb/sec Ethernet
2x 10Gb/sec Ethernet

High Speed Network:
2x 25Gb/sec Ethernet

Data/Peripherals:
4x USB 3.0

* for countries with variable power supply we recommend a UPS to provide a consistent voltage