


EX 2

THE GATEWAY TO DISGUISE

The EX 2 has been designed to provide live events and experiences with a compact yet powerful pre-rendered video playback solution, unlocking the gateway to the most advanced live visual experience platform in the world.

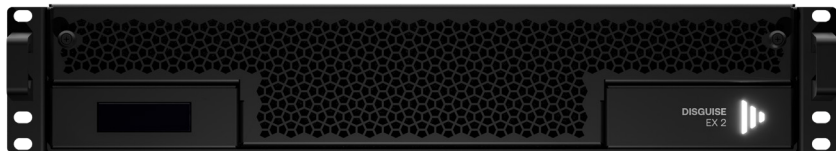

WARRANTIES & SUPPORT

2 year return to base hardware warranty (plus options to extend warranty length)

BUNDLED ACCESSORIES

Keyboard, Mouse, Power Cable (powerCON True1: USA/EU/UK), Hardware Guide, Rack Rails*

*support for server racks with square holes (9.5mm), circle holes (7.1mm) and threaded holes (up to 7.1mm).

UPGRADES

(AS - At Sale, F - Field)

- Storage Upgrade 3.84TB ^{AS, F}
- Storage Upgrade 7.68TB ^{AS, F}
- Storage Upgrade 15.36TB ^{AS, F}
- Storage Upgrade 30TB ^{AS, F}

PHYSICAL SPECIFICATIONS

	W	H	D
Packed Dimensions	620mm 24.4"	310mm 12.2"	850mm 33.46"
Unit Dimensions	441mm 17.4"	88.4mm 3.5"	645.25mm 25.4"
Unit + Rack Handles	483.6mm 19"	88.4mm 3.5"	677.5mm 26.7"
Rack Depth	-	-	677.5mm 26.7"
Unit Weight		11kg 24.2lbs	
Packed Unit Weight		21kg (est) 46.3lbs (est)	

EX 2

HARDWARE SPECIFICATIONS

Voltage: 100-240V, 50-60Hz*

Power Connection: Neutrik powerCON True1

Power Consumption Peak: 312W

Heat Dissipation Peak: 1,065 BTU/hr

Max Decibel Rating: 52.4db

Operating System: Windows 11 Enterprise GAC

GPU: NVIDIA RTX 4000 Ada

Environmental Tolerances: Temperature:


5-35°C (40°-95°F) / Humidity: 20%-80% (non-condensing) / Altitude: 0-2700m (0-8850 ft)

Mounting System: 2U 19" rack mount

OS: 1x Internal Storage Drive

Storage: 1.92TB Removable NVMe SSD (default)

Memory: 64GB RAM (4x 16GB)

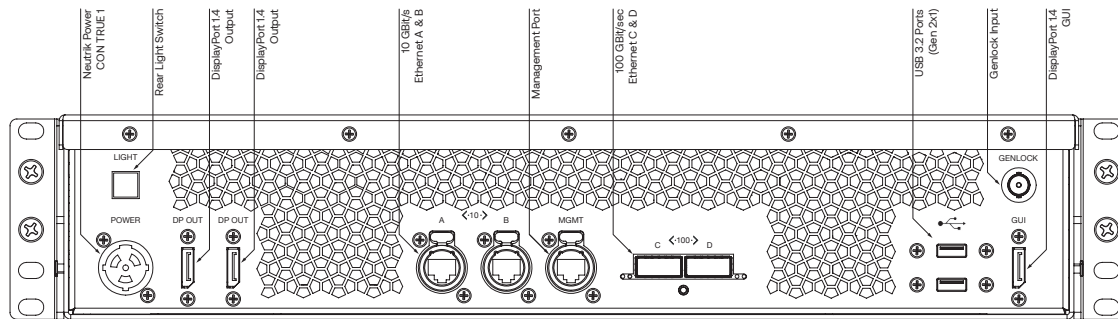

SYSTEM CONNECTIVITY I/O

Video Output:

- 1x DisplayPort 1.4 (GUI)
- 2x DisplayPort 1.4 (Outputs)

Video Input:

- Input via NDI only

Audio / Optical Audio / MIDI:

- N/A

General Network:

- 2x 10Gb/s (Ethernet)

High Speed Network: 2x 100Gb/sec (QSFP28)

System Management Controller: 1x Management Port (Ethernet)

Data/Peripherals: 2x USB 3.2 (Gen 2x1)

Video Sync: 1x BNC Genlock

* for countries with variable power supply we recommend a UPS to provide a consistent voltage.

EX 2

FULL HD PLAYBACK

Video codec & frame rate	Content data rate	Max layers
HAP 30	31 MB/s	55
HAP 60	62 MB/s	45
HAPQ 30	61.25 MB/s	50
HAPQ 60	122.5 MB/s	38
Animation 30	187.25 MB/s	40
Animation 60	374.5 MB/s	25
TIFF Sequence 30	237 MB/s	39
TIFF Sequence 60	474 MB/s	19
NotchLC 30	78.375 MB/s	38
NotchLC 60	156.75 MB/s	23
ProRes 422 30	151 MB/s	17
ProRes 422 60	302 MB/s	8
ProRes HQ 30	232 MB/s	14
ProRes HQ 60	464 MB/s	7
ProRes 4444 30	348 MB/s	9
ProRes 4444 60	696 MB/s	5

4K DCI PLAYBACK

Video codec & frame rate	Content data rate	Max layers
HAP 30	132 MB/s	21
HAP 60	264 MB/s	16
HAPQ 30	261.25 MB/s	20
HAPQ 60	522.5 MB/s	16
Animation 30	798.25 MB/s	12
Animation 60	1596.5 MB/s	5
NotchLC 30	331.5 MB/s	15
NotchLC 60	663 MB/s	7
ProRes 422 30	654 MB/s	5
ProRes 422 60	1308 MB/s	2
ProRes HQ 30	991 MB/s	4
ProRes HQ 60	1982 MB/s	2
ProRes 4444 30	1490 MB/s	2
ProRes 4444 60	2980 MB/s	1

4K DCI PLAYBACK

Video codec & frame rate	Content data rate	Max layers
DPX Sequence, 8-bit, RGB, 30	759 MB/s	8
DPX Sequence, 8-bit, RGB, 60	1518 MB/s	5
DPX Sequence, 10-bit, RGB, 30	1011 MB/s	6
DPX Sequence, 10-bit, RGB, 60	2022 MB/s	3
TGA Sequence, 8-bit, RGB, 30	759 MB/s	12
TGA Sequence, 8-bit, RGB, 60	1518 MB/s	6
TGA Sequence, 8-bit, RGBA, 30	1011 MB/s	9
TGA Sequence, 8-bit, RGBA, 60	2022 MB/s	5
TIFF Sequence, 8-bit, RGB, 30	759 MB/s	12
TIFF Sequence, 8-bit, RGB, 60	1518 MB/s	6
TIFF Sequence, 8-bit, RGBA, 30	1011 MB/s	9
TIFF Sequence, 8-bit, RGBA, 60	2022 MB/s	5

Testing completed on r28 194541

Performance specifications listed here outline the max amount of video layers that are achievable on a single EX 2. These can fluctuate in future releases.